


SKY SERIES

www.cocokorea.co.kr

www.cocorobot.co.kr

회전형 취출 로봇 Swing type take-out robot

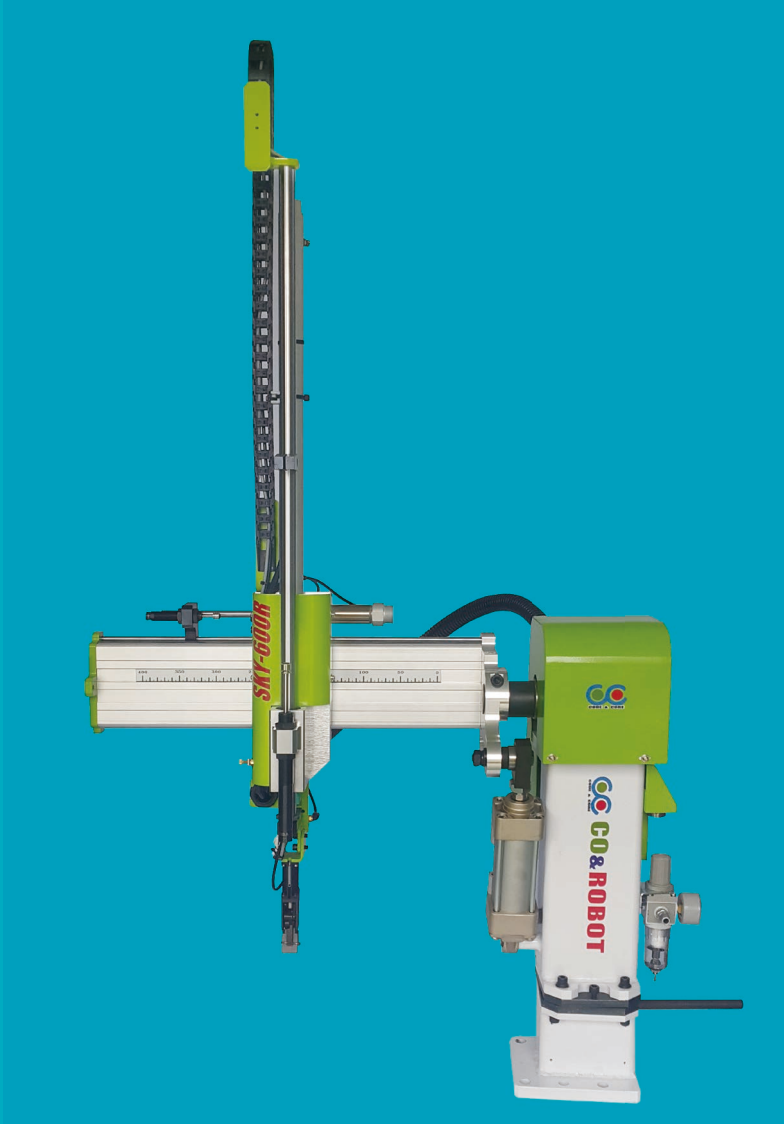

2단금형 대응(SKY-600)
For two-plate molds

모델구분(Model Series)

SKY	—	600	—	
SKY Series		Vertical Stroke(mm)		None : Standard R : Chuck Rotation V : Chuck Rotation+Suction T : For with three-plate molds

모델(Model)	Injection pressure range(ton)
SKY-450	30 ~ 80
SKY-600	80 ~ 180
SKY-800	180 ~ 280



3단금형 대응(SKY-600T)
For with three-plate mods

 코코 코리아
CODE & CORE

경기도 부천시 오정구 오정동 395-30
TEL: 032)684-8501 / FAX: 032)684-8502
홈페이지 www.cocokorea.co.kr
쇼핑몰 www.cocorobot.co.kr


| 기본사양 Basic Specification

전원	제어방식 / 구동방식	사용 공기압	최대 하용공기압
AC200V 0.25A(50/60Hz)	마이크로컴퓨터 / Air cylinder	0.4~0.5MPa	0.8MPa

| 일반사양 General Specification

MODEL		SKY-450	SKY-600	SKY-800	SKY-450T	SKY-600T	SKY-800T
Stroke	상하 (mm) Vertical	450	600	800	450	600	800
	전후 (mm) Crosswise	75	100	100	75	100	100
	회전 (°) Swing	50° ~ 90°					
전후 대기 위치 (mm) Crosswise stand-by position		Max. 470			Max. 450		
상하 대기 위치 (mm) Vertical stand-by position		90					
최대 기판 하중 (Kg) Maximum payload		2 Kg					

| 외형치수 Outer dimensions

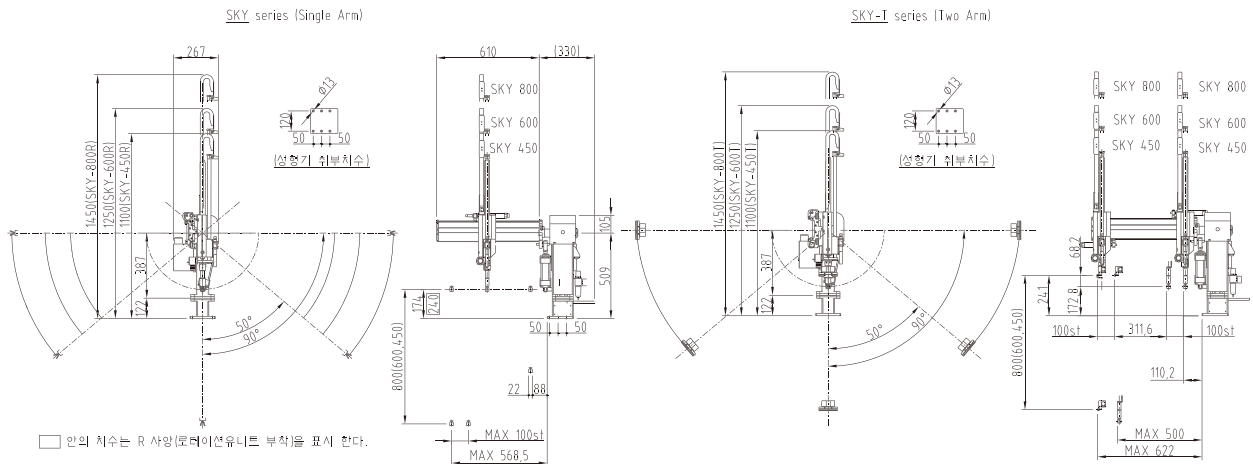

| 조작팬던트 Teaching pendant



한글 · 영어 기본 지원 (옵션 : 타국어 대응가능)
Korean · English support
(OPT: Other languages)

10개의 금형자료 저장기능
Read · Write function for Mold Data upto 10

동작가능 스위치를 통한 안전성 향상
Using enable s/w, safety improvement

비상정지 입출력 기능
Emergency stop input/output function

알기 쉬운 조작법
Easy to handle

| 표준기능 Standard functions

제품취출
Product extracting pattern

런너취출
Runner extracting pattern

전진 취출대기
Advanced position at product extract side

에젝터 연동 취출
Linked movement with the ejector of IMM

고정측 취출
Extracting from fixed mold side

회전 취출대기
Stand by at release side to extract

낙하측 하강
Drop the falling side

제품형내 낙하
Product release in mold area

척내 제품 확인
Product confirmation in chuck

진공 흡착 확인
Vacuum confirmation